


Exposed ceiling system

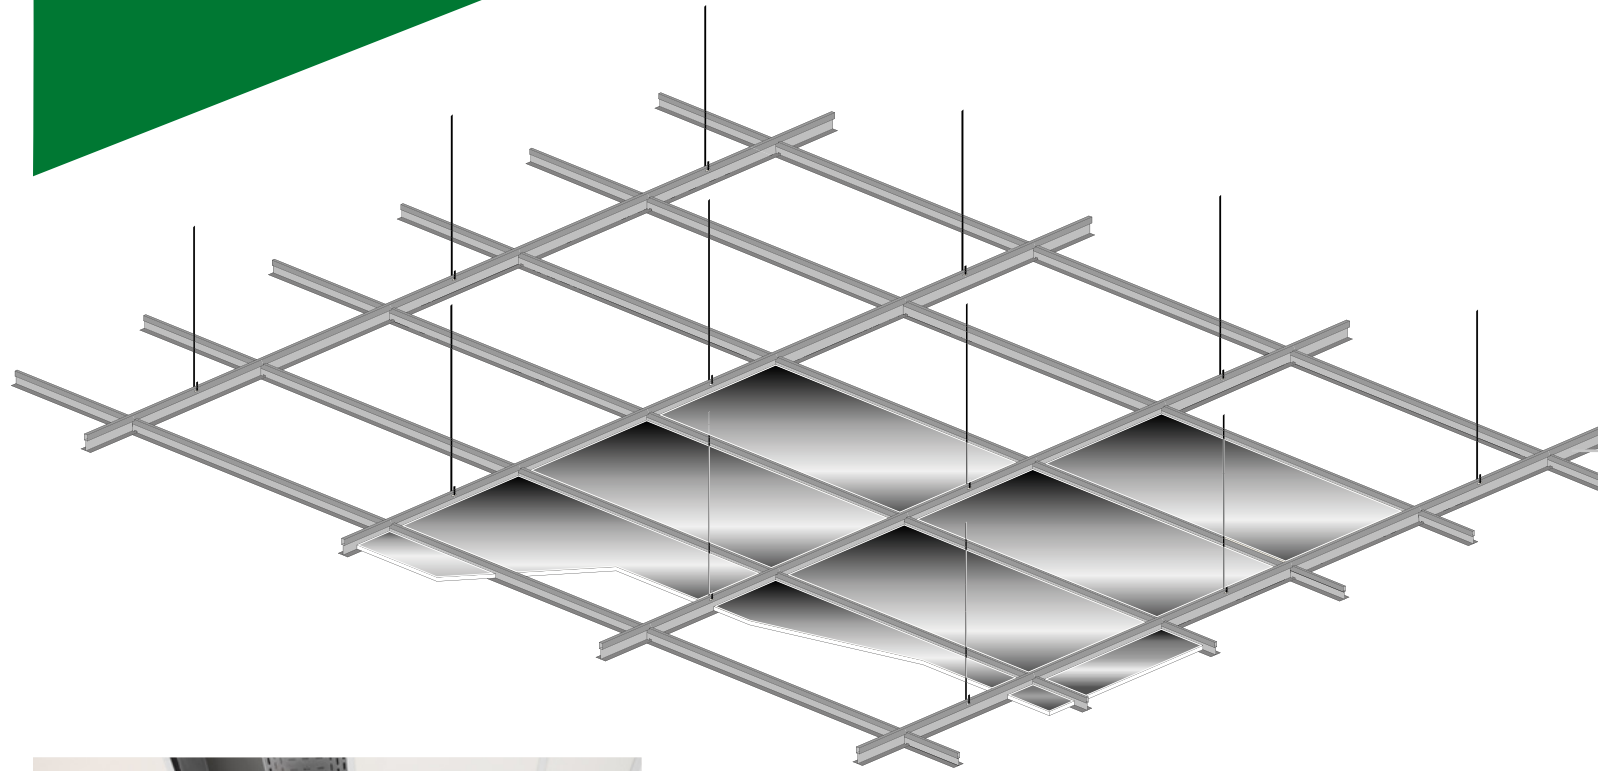


This system consists of the following products:

- Exposed main tee
- Exposed cross tee 1.2m
- Exposed cross tee 0.6m
- M6 / SM25
- Hanger strap / wire
- Ceiling insulation
- Ceiling tiles

Installation methodology:


1. Establish the ceiling height; using a laser, mark the height around the perimeter.

Suspension methods:

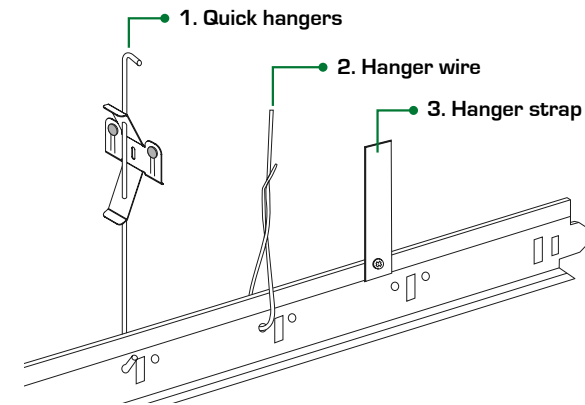


3. Install Solid suspend main tees and Solid suspended cross tees perpendicular at every 1200mm centres within the provided clips within the main tees.


SOLID - White/Black Main Tee | 38x24x0.4x3600mm

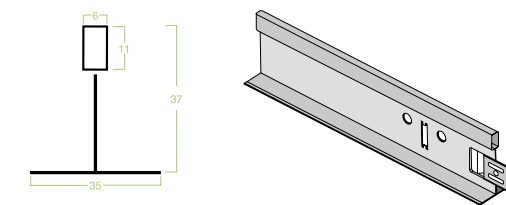

SOLID - White/Black Cross Tee | 32x24x0.4x1200mm

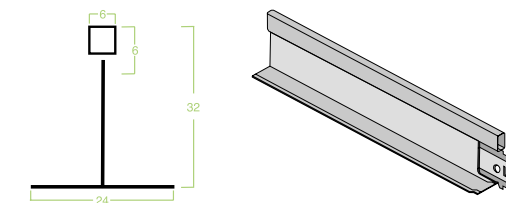


2. Fix Solid SM25/M6 around the perimeter of the ceiling on the wall, fastened with 25mm concrete nails.

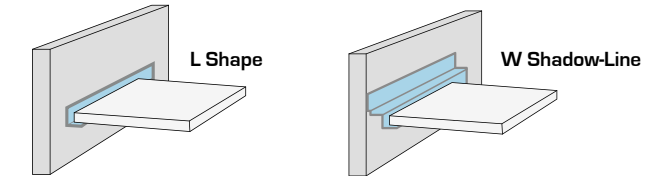

4. Lay in Solid vinyl tiles or acoustical tiles.

Vinyl

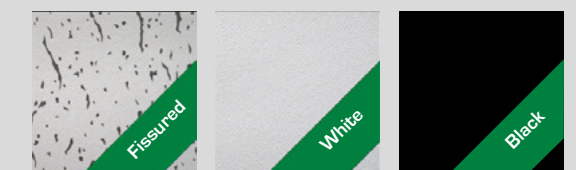

Acoustic



For improved fire, thermal and acoustic properties, lay in Knauf acoustic insulation over the ceiling grid.

BOQ Text

9mm x 1200 x 600 SOLID white gypsum tiles suspended on SOLID ceiling 24mm wide 0.4mm thick exposed tee suspension system comprising main tees at 1200mm centers with cross tees between each tile including hold-down clips, etc., all suspended with a galvanized hangers at 1200mm centers.



i This has been tested and is in accordance with ISO9001:2015 standards

i Solid vinyl tiles have been tested and is in accordance with SANS 101 - Part 5 and Part 10 - B/B1