

Solid Galvanised Grid



Product information

Used for flush plaster ceiling systems.


Benefits:

- Contractor friendly
- Recyclable
- Durable



Characteristics


Profile:	T-bar 38 mm main tee & 38 mm cross tee web with 35 mm face
Capping:	Knurled
Clips:	Main tee = Punch Clip Cross tee = Punch Clip
Galvanising level:	Z100

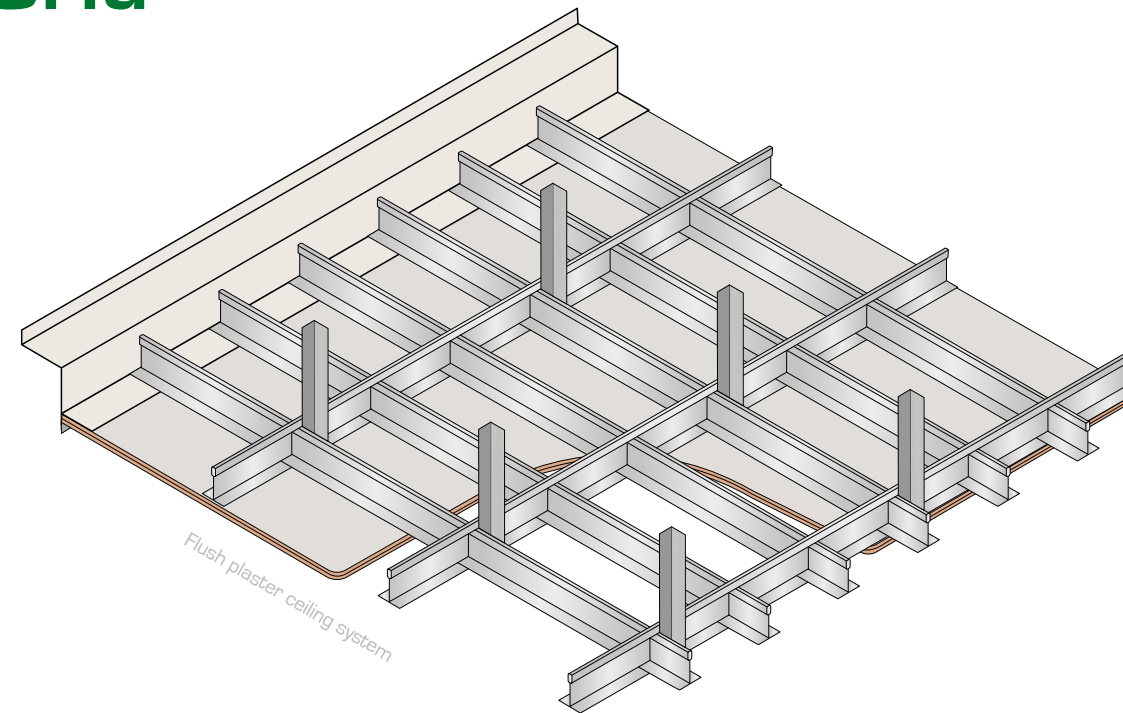

Application

The Solid Ceilings concealed grid is ideal for 9 mm plaster-boarded flush-plastered ceilings and bulkheads with no specific performance requirements.

The ceiling grid performs best in areas that are not subjected to prolonged immersion, such as shower areas or swimming pools. Proximity to conditions where high corrosion is possible should be taken into account. The ceiling grid should be installed following typical layouts for suspended ceilings.

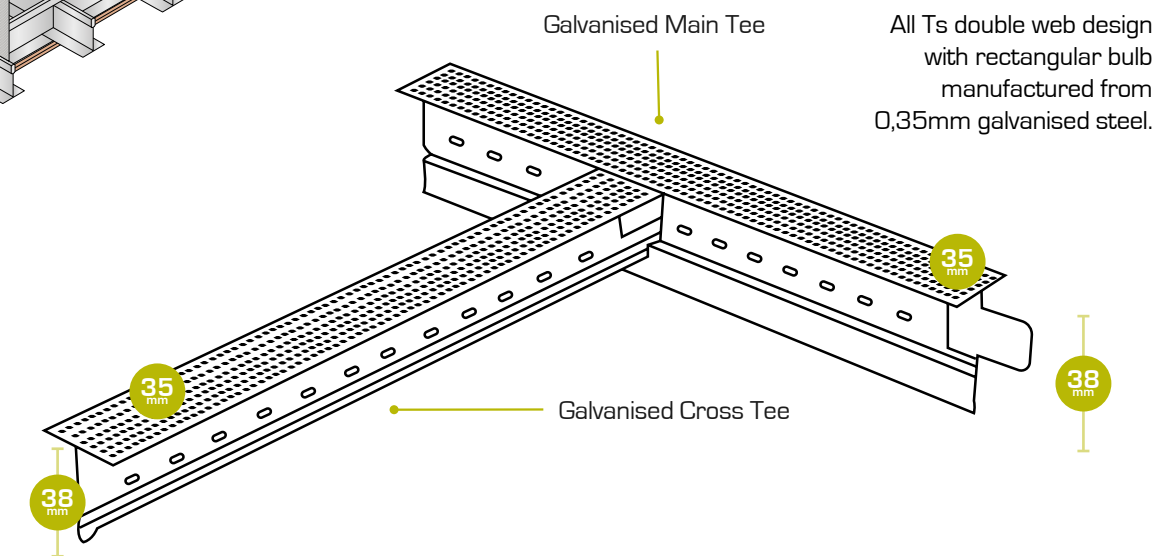

Specifications

Product description	Box qty	Web height	Face	Galv	Weight (EA)	Capping	Clip
Solid Ceiling Main Tee (3600 mm)	20 pcs	38	35	Z100	1.35 kg	Knurled	Integrated
Solid Ceiling Cross Tee (1200 mm)	60 pcs	38	35	Z100	0.42 kg	Knurled	Release



Handling & storage

The cartons are to be stored indoors on pallets that can fit their length and can also be stacked to no more than eight cartons high.

When pallet loads are broken the cartons are not to be leaned against walls or stacks of products on end face. When loading or unloading, the carton should not be tilted and slid-off a load-bed.

