


30 Minute FR Ceiling

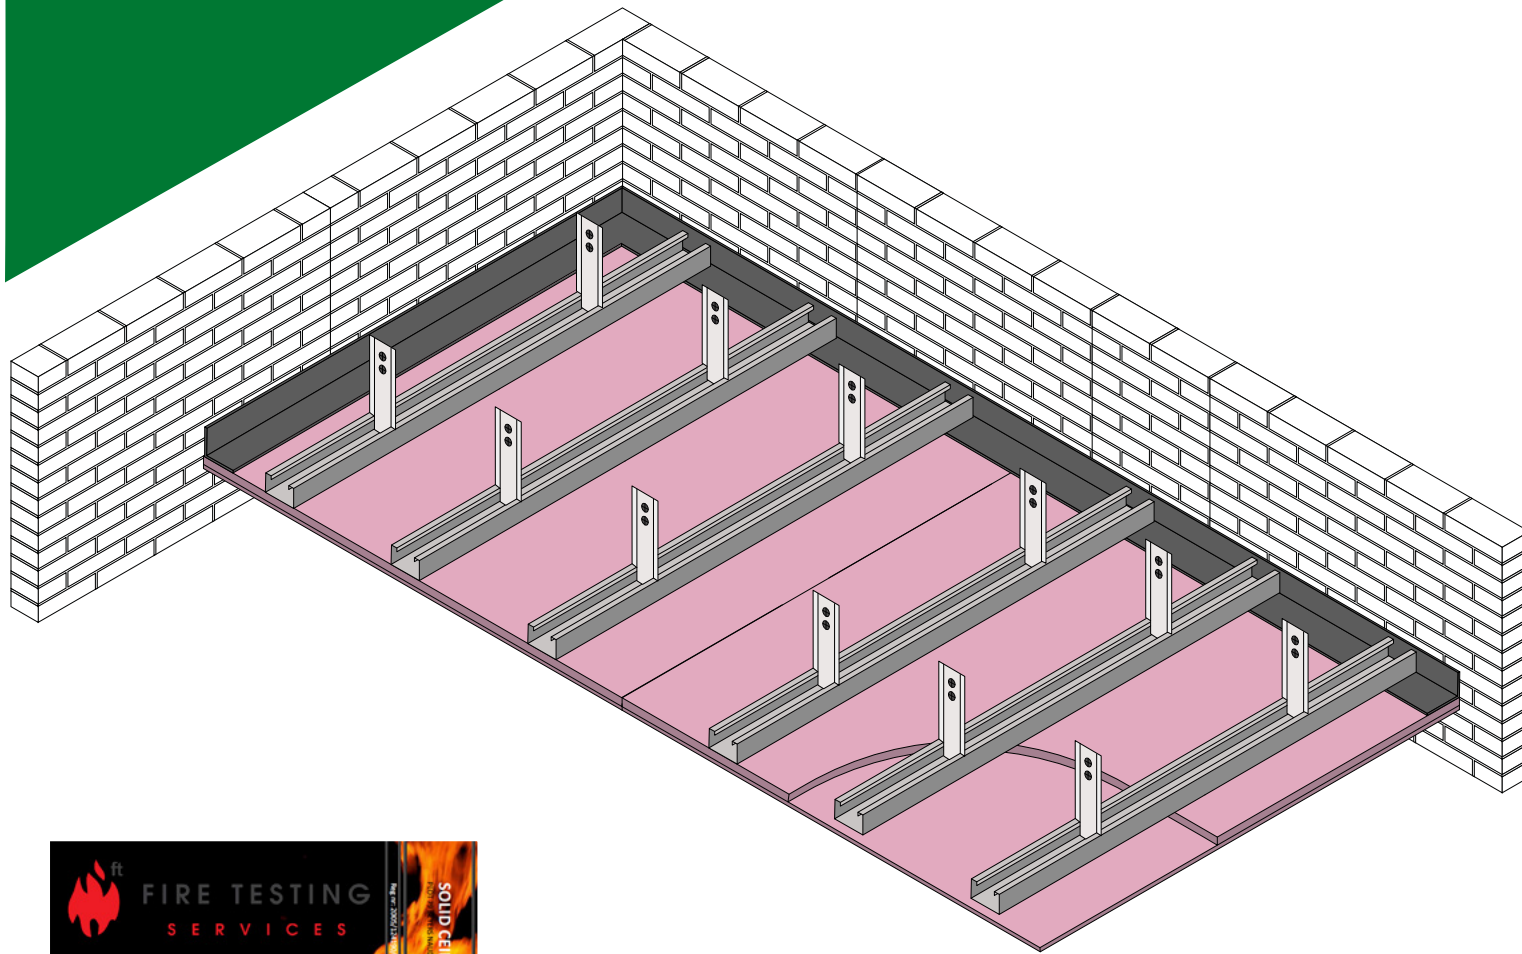


This system consists of the following products:


- Steel brandering
- Hanger brackets
- 25*25*0.6mm*3.6m galvanized angles
- 6*25mm drywall screws
- 6*40mm drywall screws
- 15mm fire board
- 12mm fire board
- Fibre tape
- Skim plaster
- 8x13mm Tek screws

Installation methodology:

1. Solid steel brandering spaced at every 300mm centres. Solid hanger brackets fastened to the beam at 600mm centres, hanger brackets secured into the solid steel brandering.

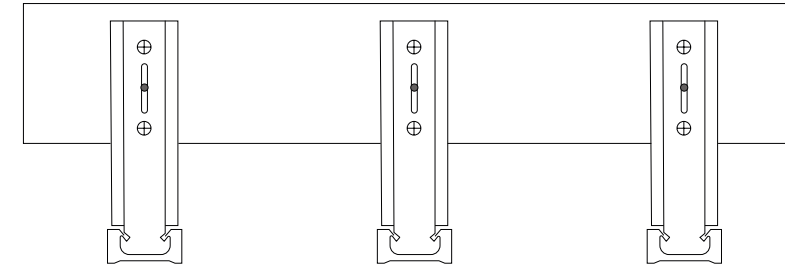


2.

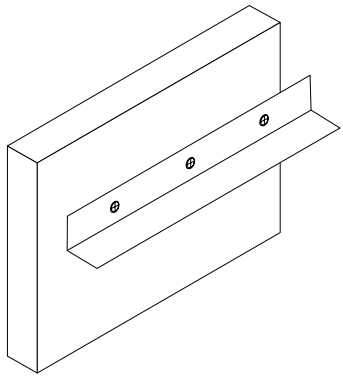


Solid 25mm * 25mm * 0.6mm * 3.6m galvanized wall angles used as the perimeter angle fixed to the wall at 300mm centres.

3. Fasten the solid steel brandering into the solid wall angles. 1st layer of Solid 15mm fireboard fixed perpendicular to the direction of the solid steel brandering using solid 6x25mm drywall screws at 150mm centres, 2nd layer of board to be 12mm fireboard fixed onto the 1st layer of 15mm fireboard with 41mm drywall screws at 150mm centres, all joints must be staggered.

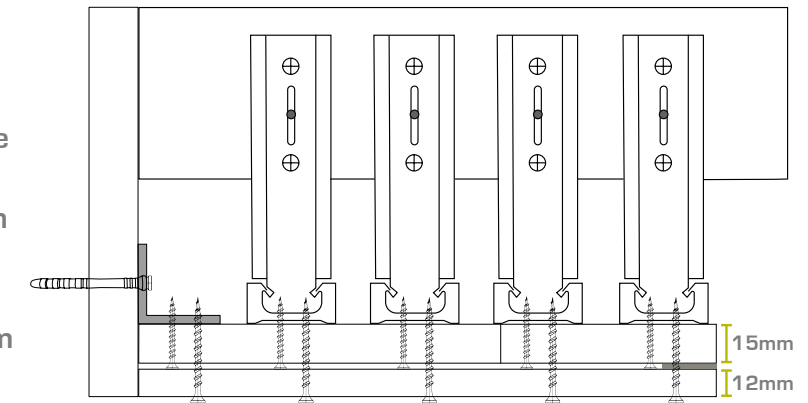

4. Use Solid fibre tape and apply to all joints

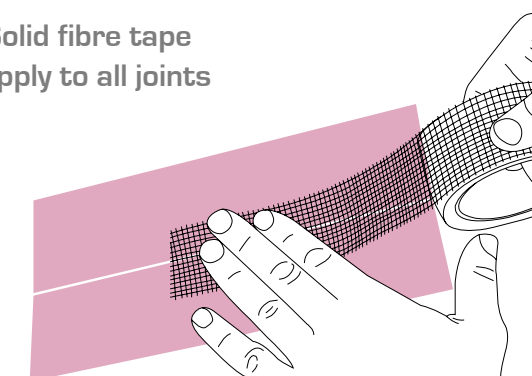

5. Cover the fibre tape joints with a single layer of solid handskim plaster.



BOQ Text

Double layer of SOLID fire rated gypsum boards consisting of SOLID 15mm fire rated gypsum board and SOLID 12mm fire rated board, secured and fastened to SOLID steel brandering at every 300mm centers suspended by SOLID hanger brackets at every 600mm centers and installed as per "SOLID Ceilings" specifications. Including SOLID galvanized full surface to be 3mm SOLID HandSkim plastered, sanded, and finished smooth.